

Plastic Extruders Ltd



Russell Gardens, Wickford, Essex, SS11 8DN, England
 Sales Tel: +44(0)1268 571116 Fax: +44(0)1268 560027
 www.plastex.co.uk e-mail: sales@plastex.co.uk



PRODUCT DATA SHEET: Floorline

Sep-13

Sizes & weights <i>All dimensions are nominal</i>		Length	Height	Widths		Weight
<i>Tolerances</i>		0+0.3	+/-0.5	+/- 1		kg/m ²
		m	mm	cm		
Floorline		10	6	60	91	3.7
		Roll weight (kg)		30	55	

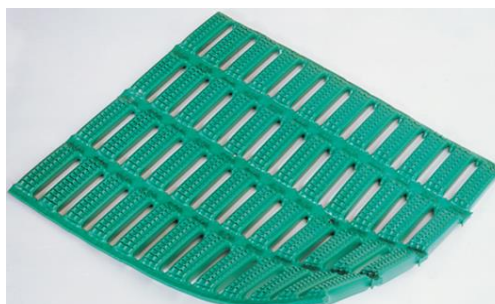

General

- APPEARANCES** Open grid "duckboard" design with hollow cushioned surface.
- COLOURS** Available in homogenous standard colours; Red, Blue, Green, Beige and White. Red colour is not colourfast in direct sunlight. Other colours available on request.
- DURABILITY** One piece welded construction for maintenance free life.
- WORKABILITY** Available in rolls for ease of installation. Easy to cut to size and shape.
- USES** All locations, both indoor and outside. Red colour is not colourfast in direct sunlight.

Technical data

- ACOUSTIC** Excellent sound absorption properties.
- CHEMICAL** Resistant to most acids, alkalines and oils. For specific chemical resistances, see www.plastexmatting.com/matfax/doc.php?doc_id=154&action=inline
- COMPOSITION** Flexible DINP plasticised Polyvinyl Chloride (PVC).
- ENVIRONMENT** Plastex does not use any substances currently included in the SVHC (Substances of Very High Concern) list under R.E.A.C.H.* in any matting products. All products are 100% recyclable.
 * Registration, Evaluation, Authorisation and Restriction of Chemical substances
- FIRE** DIN 4102 Part 1- Classification B2.
 BS 2782 Part 1, method 140A: 1992 (ISO 1210: 1992)
- HYGIENE** Non-porous 100% Virgin PVC - Inhibits the growth of bacteria.
- SLIP RESISTANCE** ASTM F 1677 (Dry/Wet): (0.6/0.5)
 DIN51130: R11, V10
 DIN51097: Classification C
- REVERSION** Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments (refer to www.plastexmatting.com/matfax/doc.php?doc_id=254&action=inline).
- THERMAL** Functional -23°C +60°C (slight size variation may occur at temperature extremes).
- UV LIGHT** Resistant to PVC degradation; uncoloured PVC material - BS EN 607 = Delta E 1.02.
- WARRANTY** 1 year. See www.plastexmatting.com/matfax/doc.php?doc_id=167&action=inline